

# Hydraulic Controller Data Forms

## Project Data

EC Data Form.xls  
Revised 11/20/09

Page  
1 of 8

EC Job Number: \_\_\_\_\_

Date Received: \_\_\_\_\_

**Instructions:**

1. Please complete data forms as completely as possible. Incomplete data may delay delivery.
2. A non-response to a question will be considered as non-applicable to this project.
3. All applicable data should be measured on existing equipment, which is to be retained.
4. The bottom landing shall be referred to as the landing 1, and shall be the reference landing without regard to the building floor labels.
5. Contact Elevator Controls Corporation engineering department at 916-428-1708, if any questions arise regarding the required data.

**NOTE: Your controller will be built according to the data furnished herein.**

EC Quote #: \_\_\_\_\_

P.O. #: \_\_\_\_\_

Customer #: \_\_\_\_\_

**Job Name:** \_\_\_\_\_

Job Location: \_\_\_\_\_

Job Address: \_\_\_\_\_

Job City: \_\_\_\_\_

Job State: \_\_\_\_\_

Zip Code: \_\_\_\_\_

Yes

No

Job Specifications

Yes

No

Specifications have been sent to ECC

Consultant: \_\_\_\_\_

Contact: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

**Shipping Information:**

Contact Name: \_\_\_\_\_

Shipping Address: \_\_\_\_\_

City: \_\_\_\_\_

State: \_\_\_\_\_

Zip Code: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

Notice Required:

24 Hours

48 Hours

Other: \_\_\_\_\_

Lift gate truck required

Installation Type:

New Construction

Modernization

Duty Type:

Passenger

Service

Freight

Building Classification:

Office

Hotel, Apartment, Condo

Hospital

School or University

Other: \_\_\_\_\_

**Code Compliance United States:**

Emergency Brake Required

ASME A17.1-  2007

2004

2000

ASME A17.1- \_\_\_\_\_

**Code Compliance International:**

Canada B44-  2007

2004

2000

Other (specify) \_\_\_\_\_

**Motor(s) ship to address (if supplied by EC):**

Same as above shipping information

Contact Name: \_\_\_\_\_

Shipping Address: \_\_\_\_\_

City: \_\_\_\_\_

State: \_\_\_\_\_

Zip Code: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

**Additional state or local code compliance:**

Chicago

Michigan

GSA

New York City

Other \_\_\_\_\_

Additional Compliance Requirements? Explain

Delivery Schedule	
Controller	Delivery Date (on site)
Car	_____
Car	_____
Car	_____
Car	_____
Group	_____
Cross Cancel or Reg. Panel	_____

**Data Forms Completed By:**

Name/Title: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Mobile: \_\_\_\_\_

Email: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

# Hydraulic Controller Data Forms

## Hoistway Data

**Instructions:**

1. Place an "X" in the appropriate box to indicate a floor opening. (F=Front & R=Rear)
2. To ensure proper selector application, indicate all floor to floor heights.
3. Provide an additional hoistway data page for each elevator that has different floor heights or openings.

EC Elevator ID:			Car A	Car B	Car C	Car D	Car E	Car F	Car C.L.	Hall C.L.	CODE BLUE	I.R.	S.R.											
Building Elevator ID:																								
LDG #	Floor Label	Floor Height	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R
	Overhead																							
32																								
31																								
30																								
29																								
28																								
27																								
26																								
25																								
24																								
23																								
22																								
21																								
20																								
19																								
18																								
17																								
16																								
15																								
14																								
13																								
12																								
11																								
10																								
9																								
8																								
7																								
6																								
5																								
4																								
3																								
2																								
1																								
	Pit																							
Capacity: <input type="checkbox"/> lbs <input type="checkbox"/> kg															Lobby landing #: <input type="text"/> Floor Label: <input type="text"/>									
Speed: <input type="checkbox"/> fpm <input type="checkbox"/> m/s															Car C.L. = Car Call Lockout Floor Hall C.L. = Hall Call Lockout Floor									
Total Travel <input type="checkbox"/> ft <input type="checkbox"/> m															I.R. = Inconspicuous Riser (Swing Operation) S.R. = Special Riser (attach explanation)									

Number of Hoistways:  1  2  \_\_\_\_\_ Hoistway NEMA Rating:  1 (standard)  12  4  4X

Selector:  By EC  Customer Provided Selector Type:  IP8300 (tape)  Switch and Vane

Rail Size (lbs):  10-12  15-18  22-30  TM Switch (music box)

Terminal slowdown limit switches by EC:  
 Mechanical\* # of switches required:   8 Cartop Magnetic  14 Cartop Magnetic

Final limit switches by EC: (mechanical\*)

\*Mechanical (LS1) limit switches come with standard 15lbs rail brackets and hardware.

# Hydraulic Controller Data Forms

## Control Features

EC Data Form.xls  
Revised 11/20/09

Page  
3 of 8

EC Job Number: \_\_\_\_\_

Machine room space limitations \_\_\_\_\_ H \_\_\_\_\_ W \_\_\_\_\_ D  
Explain: \_\_\_\_\_

Refer to page 6 of data forms, for applicable enclosure sizes (NEMA 1 only).

**Controller NEMA Rating Requirement:**

1 (standard)  12  4  4X  
 Air conditioned enclosure  
(recommended for all except NEMA 1)

**Type of Operation:**

Simplex:  
 Selective Collective  
 SAPB Single Automatic Pushbutton  
 Single Button Collective  
 Down Collective  
 Duplex Selective Collective  
 Group Number of Cars: \_\_\_\_\_  
 Length of duplexing or grouping cable(s) required: \_\_\_\_\_ ft.  
 Allow for an additional 5 feet at each end to permit hookup inside controller enclosure. (Interconnects between controllers and/or group)  
 Number of hall call risers: \_\_\_\_\_

Swing Car Operation: Car(s): \_\_\_\_\_  
 Key switch in car  Key switch in hall  
 Cross Cancellation Panel

**Fire Service Operation:**

Fire Service Phase I:  
 3 position keyswitch  2 position keyswitch  
 Fire Service Phase II (3 position keyswitch)  
 Main Recall Landing #: \_\_\_\_\_ Floor Label: \_\_\_\_\_  
 Doors will open at:  Front  Rear  
 Alt. Recall Landing #: \_\_\_\_\_ Floor Label: \_\_\_\_\_  
 Doors will open at:  Front  Rear  
 Additional Fire Recall Switch:  
 Location Landing #: \_\_\_\_\_ Floor Label: \_\_\_\_\_

**Inspection Operation:**

Hoistway Access Operation:  
 Top access switch (top landing):  
 Location:  Front  Rear  
 Bottom access switch (bottom landing):  
 Location:  Front  Rear  
Top & bottom access switches are required to be 2 pole.  
 In-Car Inspection Operation:  
 Using top & bottom car calls (2nd pole of P/B)  
 Using separate up & down buttons  
**In-Car Access & Inspection Switch Type (COP):**  
 Access/In-Car insp. switch (3 position - two pole)  
 Access switch (2 position - single pole)  
 In-Car inspection switch (2 position - single pole)

Absolute Floor Encoding (AFE) (A17.1-07 & CA required)  
 Attendant Operation:  Annunciator panel in car

Car to Lobby Switch:  Car  Hall  Other \_\_\_\_\_  
 Park with doors:  Open  Closed  
 Return Landing #: \_\_\_\_\_ Floor Label: \_\_\_\_\_

Earthquake Operation:  
 Seismic switch  Counterweight derailment device  
 Car adjacent to counterweight switch  
 Car operates on fire or hospital service (reduced speed)

Emergency Power Generator  
 E.P. contact during normal op.  Open  Closed  
 Power pre-transfer contact  
 Sequential lowering (standard)  
 If not, number of cars to run simultaneously: \_\_\_\_\_  
 Manual select switch: # of Pos: \_\_\_\_\_ Labels: \_\_\_\_\_  
 A17.1-2000 requires indicator(s), if the switch is not in view of the elevator entrance(s).

Emergency Medical Technician Service (EMT):  
 Return Landing #: \_\_\_\_\_ Floor Label: \_\_\_\_\_  
 Hospital Service (Code Blue): (indicate landings served on page 2)  
 # of cars allowed to run on hospital service: \_\_\_\_\_  
**Hospital Service Phase 2 Operation:**  
 Hospital phase 2 switch  Independent service switch  
 Other (explain): \_\_\_\_\_

Independent Service Switch:  Car (std.)  Hall  
 Load Weighing:  By EC  Others: \_\_\_\_\_  
 K-Tech strain gauge: Model: \_\_\_\_\_  
 Discrete load weigher signals (dry contacts):  
 Hall call bypass  Anti-nuisance  Overload

Sabbath Operation

Security (check applicable requirements below)  
 EC standard security (utilizing COP car call combinations)  
 Call lockout: (indicate landings served on page 2)  
 Car:  Card Reader  Key  Other: \_\_\_\_\_  
 Hall:  Card Reader  Key  Other: \_\_\_\_\_  
 Call lockout override switch:  Car  Hall  
 Bypass Security: (bypass on fire service is standard)  
 Independent Service  Attendant Service  
 Other: \_\_\_\_\_

Anti-Terrorism Control  
 Baby Abduction  Interact Security Control  
 Special Security: \_\_\_\_\_  
 Shutdown Switch:  Car  Hall

Additional features required: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_



# Hydraulic Controller Data Forms

## Door Information

EC Data Form.xls  
Revised 11/20/09

Page  
5 of 8

EC Job Number: \_\_\_\_\_

New door operator:  
Supplier: \_\_\_\_\_  
Contact: \_\_\_\_\_  
P.O.#: \_\_\_\_\_ Phone: \_\_\_\_\_

Existing door operator

### Car Gate and Hoistway Doors:

Automatic car gate  
 Manual car gate  
Gate release solenoid: Voltage: \_\_\_\_\_ V Ph. \_\_\_\_\_  
Current: \_\_\_\_\_ A Description: \_\_\_\_\_

### Automatic Passenger Door Operators:

Place an "X" in the appropriate box to indicate

F	R	door operator. (F = Front and R = Rear)
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOVFR: <input type="checkbox"/> 1 <input type="checkbox"/> 2
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOD (shunt wound): <input type="checkbox"/> 230V <input type="checkbox"/> 115V
<input type="checkbox"/>	<input type="checkbox"/>	GAL MODPM (permanent magnet)
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOM/MOH
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOCT/MOCTA: <input type="checkbox"/> 230V <input type="checkbox"/> 115V
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOSVCL/MOMSVL/MOHSVL
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOA
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOMCT/MOHCT: <input type="checkbox"/> 230V <input type="checkbox"/> 115V
<input type="checkbox"/>	<input type="checkbox"/>	GAL MODCT/MOCT: <input type="checkbox"/> 240V <input type="checkbox"/> 120V
<input type="checkbox"/>	<input type="checkbox"/>	MAC PM-SSC
<input type="checkbox"/>	<input type="checkbox"/>	MAC Old Style
<input type="checkbox"/>	<input type="checkbox"/>	ECL: <input type="checkbox"/> 895 <input type="checkbox"/> 1000 <input type="checkbox"/> 2000
<input type="checkbox"/>	<input type="checkbox"/>	Schindler QKS: <input type="checkbox"/> 14 <input type="checkbox"/> 15
<input type="checkbox"/>	<input type="checkbox"/>	Dover Type D
<input type="checkbox"/>	<input type="checkbox"/>	Dover: <input type="checkbox"/> DC62 <input type="checkbox"/> DC68
<input type="checkbox"/>	<input type="checkbox"/>	Dover: <input type="checkbox"/> HD70 <input type="checkbox"/> HD73 <input type="checkbox"/> HD91 <input type="checkbox"/> HDLM
<input type="checkbox"/>	<input type="checkbox"/>	Otis Type "F"
<input type="checkbox"/>	<input type="checkbox"/>	Otis: <input type="checkbox"/> 20S <input type="checkbox"/> 30S
<input type="checkbox"/>	<input type="checkbox"/>	Otis 6970A: <input type="checkbox"/> Reactance <input type="checkbox"/> Resistance
<input type="checkbox"/>	<input type="checkbox"/>	Otis 7300 (220VAC, 3PH)
<input type="checkbox"/>	<input type="checkbox"/>	Otis A7770A
<input type="checkbox"/>	<input type="checkbox"/>	Otis 7782AA
<input type="checkbox"/>	<input type="checkbox"/>	Westinghouse Type B w/ retiring cam
<input type="checkbox"/>	<input type="checkbox"/>	Westinghouse Type E (120VDC)
<input type="checkbox"/>	<input type="checkbox"/>	Atlantic Tech <input type="checkbox"/> 9001 <input type="checkbox"/> 9003
<input type="checkbox"/>	<input type="checkbox"/>	IPC Encore (closed loop)
<input type="checkbox"/>	<input type="checkbox"/>	Fermator
<input type="checkbox"/>	<input type="checkbox"/>	Haughton: Model: _____
<input type="checkbox"/>	<input type="checkbox"/>	R & R
<input type="checkbox"/>	<input type="checkbox"/>	MCE Smartraq
<input type="checkbox"/>	<input type="checkbox"/>	Other: _____

\*Please send/provide door operator wiring diagrams.

### Hoistway Door Type:

Automatic passenger (horizontal sliding)  
 Automatic freight (vertical sliding)  
 Swing\*  
 Manual\*

\*Interlocks:  
 Door closed contacts (separate from locked contacts)  
 Door locked contacts  
Brand: \_\_\_\_\_ Model: \_\_\_\_\_

Door locking cam:  
 Fixed  
 Mechanical (driven by automatic car gate)  
 Retiring: Voltage: \_\_\_\_\_ AC  DC Ph. \_\_\_\_\_  
Current: \_\_\_\_\_ A Notes: \_\_\_\_\_

### Power Freight Doors: non-standard & freight doors prints are required

Door operator wiring diagrams have been sent to ECC\*

Courion:  New  Existing\* Model: \_\_\_\_\_

EMS:  New  Existing\* Model: \_\_\_\_\_

Peele:  New  Existing\* Model: \_\_\_\_\_

Other:  New  Existing\* Model: \_\_\_\_\_

### Freight Door Operation:

Door Opening:  Automatic  Momentary pressure  
 Constant pressure

Door Closing:  Automatic  Momentary pressure  
 Constant pressure

Fire Ph. 1 Closing:  Automatic  Momentary pressure  
 Constant pressure

Notes: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

### Door Features:

Infrared detector/dual-beam photo eye unit:  
 Cut-out switch located in COP  
 Anti-nuisance

Mechanical safety edge

Heavy doors at landings: \_\_\_\_\_

Door hold:  Switch  Button: (time) \_\_\_\_\_ sec.

Nudging:  Reduced torque with buzzer  
 Buzzer only

**Controller Type:**  H900  H800

**Line Voltage:** \_\_\_\_\_ (measured)

- AC 3 phase (symmetrical with respect to ground)  
 AC single phase  
 60 Hz  50 Hz

**Hydraulic Motor Data:**

- Existing  New  
 Brand: \_\_\_\_\_ Model: \_\_\_\_\_  
 HP: \_\_\_\_\_ FLA: \_\_\_\_\_  
 Voltage: \_\_\_\_\_ VAC, 3 Phase, 60Hz  
 Measured  Data sheet  
 Multiple pump motors:  
 Number of motors:  2  Other: \_\_\_\_\_  
 Number of disconnects:  1  2  Other: \_\_\_\_\_  
 Sequential Starting (standard)  
 Simultaneous Starting  
 Note: Standard - no single motor operation.

**Motor Starting:** (single ph. line voltage use solid state or ATL only)

Stand alone reverse phase sensor included on all starters except, solid state starter (built-in) and single phase systems.

- By EC  
 Customer supplied starter:  
 Brand: \_\_\_\_\_ Model: \_\_\_\_\_  
 Remote  
 Leave space inside the controller:  
 Dimensions required: \_\_\_\_\_ H \_\_\_\_\_ W \_\_\_\_\_ D  
 Solid State - Siemens (Nordic):  
 3/9 lead motor  6/12 lead motor  
 WYE-Delta  
 ATL (across the line)  
 Other\*: \_\_\_\_\_

\*Wiring diagrams are required.

**Valve Data:**

- Brand:  Maxton  EECO  Blain  
 Dover  Bucher  GMV  
 Other: \_\_\_\_\_  
 Model: \_\_\_\_\_

- Number of valves:  1 (standard)  2  3  4  \_\_\_\_\_  
 Coils per valve:  1  2  3  4 (standard)  \_\_\_\_\_  
 Valve voltage:  120VAC (standard)  Other: \_\_\_\_\_  AC  DC

Note: If voltage is not specified 120VAC will be provided:

**Additional Requirements:**

- Low oil switch  
 Viscosity control  
 Pressure switch (required when top of cylinder is above top of storage tank)  
 Roped hydraulic unit:  
 Make: \_\_\_\_\_ Describe: \_\_\_\_\_  
 Governor with remote set & reset solenoids:  
 Voltage: \_\_\_\_\_  AC  DC FLA: \_\_\_\_\_  
 Synchronizing circuit (dual and telescopic pistons)  
 Battery powered lowering device:  
 By EC  Customer supplied\*  
 \*If customer supplied model: \_\_\_\_\_  
 Passenger doors  Power freight doors


**Enclosure Sizes (Nema 1):**

- 36"H x 22"W x 16"D (Prodigy)  
 30"H x 36"W x 7"D (standard)  
 38"H x 36"W x 10"D  
 48"H x 36"W x 14"D

Additional Information: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Using the grid layout below, identify each elevator by a number/name as appropriate for the building configuration. Place a 'X' through unused hoistways. Indicate location of the hall call pushbuttons, door openings and walls, as shown in the example below.

Example drawing of a 3 car group.

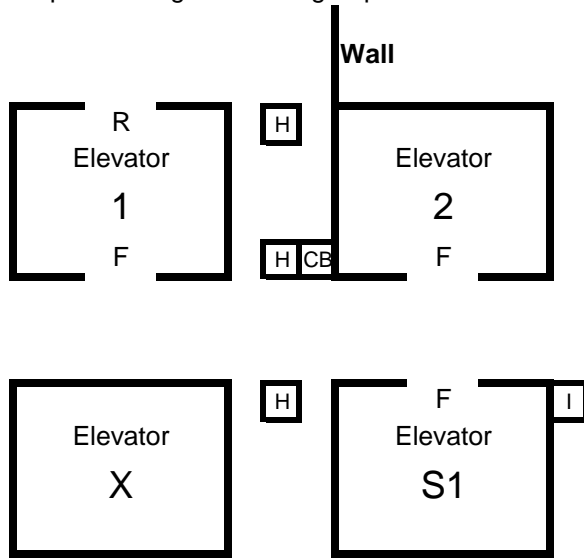


Door openings:  
F = Front opening  
R = Rear opening

Notes: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Hall Call Risers:  
 H Hall call riser (group)  
 I Inconspicuous riser  
 CB Code Blue (hospital service) riser

Notes: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

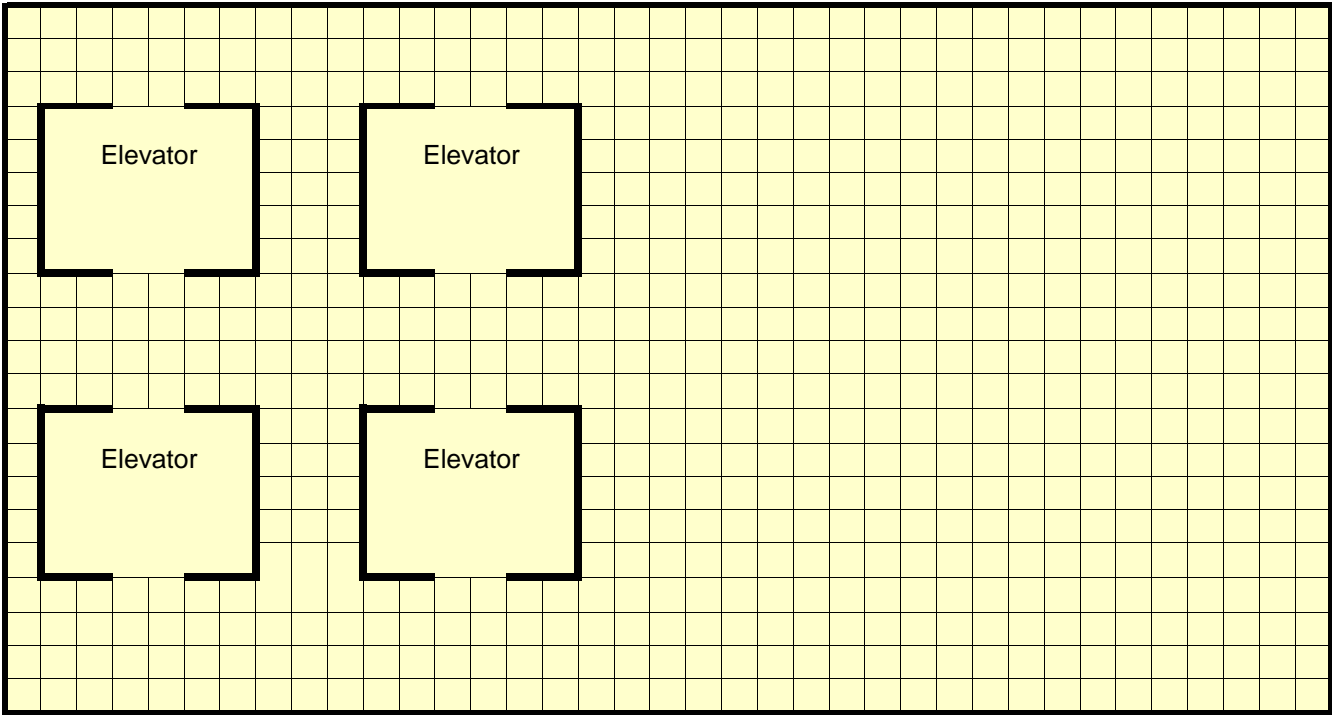

Special instructions: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

# Hydraulic Controller Data Forms

## Monitoring Data

EC Data Form.xls  
Revised 11/20/09

Page  
8 of 8

EC Job Number: \_\_\_\_\_

Machine Room Monitor 19"LCD flat screen  
 Other: \_\_\_\_\_

Special Instructions: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Remote Monitoring Station:  
 Interact                       Liftnet (IDS)  
 Single Group                 Multi-group  
 Desktop PC                    Quantity: \_\_\_\_\_  
 Laptop PC                     Quantity: \_\_\_\_\_  
Monitor Type:  
 19" LCD flat screen (standard)  
 Other: \_\_\_\_\_

Distance from controller to remote PC\*: \_\_\_\_\_ ft.

\*If distance is longer than 400ft. repeaters are required.

Location:

Lobby                               Security room  
 Fire control room               Concierge desk  
 Other: \_\_\_\_\_

Communication media:

Ethernet  
 Line driver:  By ECC             Others  
 Modem:             By ECC                     Others

Printer required

Using the grid layout below to sketch the remote monitoring system required.

