

**Traction AC Controller Data Forms**

**Project Data**

EC Data Form.xls	Revised 11/25/11	Page 1 of 8
Job Name:	EC Job Number:	

Date Received: \_\_\_\_\_

Instructions:

1. Please fill out these data forms as completely as possible. Incomplete data may delay delivery.
2. A blank or no selection will be considered as item non-applicable to this project.
3. All applicable data should be measured on the existing equipment, when it is to be retained.
4. The bottom landing shall be referred to as landing 1, and shall be the reference landing without regard to the building floor labels.
5. Contact Elevator Controls Corporation engineering department at 916-428-1708, if any questions arise regarding the required data.

**NOTE: Your controller will be built according to the data furnished herein.**

EC Quote #: \_\_\_\_\_ P.O. #: \_\_\_\_\_ Customer #: \_\_\_\_\_

**Job Name:** \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
**Job Location:** \_\_\_\_\_  
**Job Address:** \_\_\_\_\_  
**Job City:** \_\_\_\_\_  
**Job State:** \_\_\_\_\_ **Zip Code:** \_\_\_\_\_

Yes  No Job Specifications  
 Yes  No Specifications have been sent to ECC  
**Consultant:** \_\_\_\_\_  
**Contact:** \_\_\_\_\_  
**Phone:** \_\_\_\_\_ **Fax:** \_\_\_\_\_  
**Email:** \_\_\_\_\_

**Contractor Information:**

**Company:** \_\_\_\_\_  
**Contact Name:** \_\_\_\_\_  
**Address:** \_\_\_\_\_  
**City:** \_\_\_\_\_  
**State:** \_\_\_\_\_ **Zip Code:** \_\_\_\_\_  
**Phone:** \_\_\_\_\_ **Fax:** \_\_\_\_\_  
**Email:** \_\_\_\_\_

**Installation Type:**  New Construction  
 Modernization  
**Duty Type:**  Passenger  Service  Freight  
**Building Classification:**  
 Office  Hotel, Apartment, Condo  
 Government  Hospital/Medical Facility  
 School or University  Prison/Jail  
 Other: \_\_\_\_\_

**Shipping Information:**

Ship to the contractor office address above  
**Company:** \_\_\_\_\_  
**Contact Name:** \_\_\_\_\_  
**Shipping Address:** \_\_\_\_\_  
**City:** \_\_\_\_\_ **State:** \_\_\_\_\_ **Zip Code:** \_\_\_\_\_  
**Phone:** \_\_\_\_\_ **Fax:** \_\_\_\_\_  
**Email:** \_\_\_\_\_

**Code Compliance United States:**

ASME A17.1-  2010  2007  2004  
 ASME A17.1-1996/98  
 ASME A17.1- \_\_\_\_\_

**Code Compliance International:**

Canada B44-  2010  2007  2004  
 Other (specify) - \_\_\_\_\_

**Notice Required:**

24 Hours  48 Hours  Other: \_\_\_\_\_  
**Shipping Method:**  Ground  Air  
 Lift gate truck required

**Additional state or local code compliance:**

California OSHPD Medical Facility Certification Req.  
 Chicago  Nebraska  
 GSA/Federal  New York City  
 Michigan  Washington (Seattle)  
 Other \_\_\_\_\_

**Motor(s) ship to address (if supplied by EC):**

**Motor Reference #:** \_\_\_\_\_  
 Same as above shipping information  
**Contact Name:** \_\_\_\_\_  
**Shipping Address:** \_\_\_\_\_  
**City:** \_\_\_\_\_ **State:** \_\_\_\_\_ **Zip Code:** \_\_\_\_\_  
**Phone:** \_\_\_\_\_ **Fax:** \_\_\_\_\_  
**Email:** \_\_\_\_\_

Additional Compliance Requirements? Explain

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Delivery Schedule	
Controller	Delivery Date (on site)
Car	
Car	
Car	
Car	
Group	
Cross Cancel or Reg. Panel	

**Data Forms Completed By:**

**Name/Title:** \_\_\_\_\_  
**Phone:** \_\_\_\_\_ **Fax:** \_\_\_\_\_  
**Mobile:** \_\_\_\_\_  
**Email:** \_\_\_\_\_  
**Company:** \_\_\_\_\_  
**Signature:** \_\_\_\_\_

**Traction AC Controller Data Forms**

**Hoistway Data**

Instructions:

1. Place an "X" in the appropriate box to indicate a floor opening. (F=Front & R=Rear)
2. To ensure proper selector application, indicate all floor to floor heights.
3. Provide an additional hoistway data page for each elevator that has different floor heights or openings.

EC Elevator ID:			Car A		Car B		Car C		Car D		Car E		Car F		Car C.L.		Hall C.L.		CODE BLUE		I.R.		S.R.							
Building Elevator ID:																														
LDG #	Floor Label	Floor Height	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R
	Overhead																													
32																														
31																														
30																														
29																														
28																														
27																														
26																														
25																														
24																														
23																														
22																														
21																														
20																														
19																														
18																														
17																														
16																														
15																														
14																														
13																														
12																														
11																														
10																														
9																														
8																														
7																														
6																														
5																														
4																														
3																														
2																														
1																														
	Pit																													
Capacity: <input type="checkbox"/> lbs <input type="checkbox"/> kg															Lobby landing #: <input type="text"/> Floor Label: <input type="text"/>															
Speed: <input type="checkbox"/> fpm <input type="checkbox"/> m/s															Car C.L. = Car Call Lockout Floor Hall C.L. = Hall Call Lockout Floor I.R. = Inconspicuous Riser (Swing Operation) S.R. = Special Riser (attach explanation)															
Total Travel <input type="checkbox"/> ft <input type="checkbox"/> m																														

Number of Hoistways:  1  2  \_\_\_\_\_ Hoistway NEMA Rating:  1 (standard)  12  4  4X

**Selector:**  By EC  Customer Provided **Selector Type:**  IP8300 (tape)  Switch and Vane  
IP8300 Tape Type:  Steel (standard)  Poly coated  Stainless Steel

Rail Size (lbs):  10-12  15-18  22-30  TM Switch (music box)

Terminal slowdown limit switches by EC:  Mechanical\* # of switches required:

8 Cartop magnetic  14 Cartop magnetic  18 Cartop magnetic

Final limit switches by EC: (mechanical\*)

\*Mechanical (LS1) limit switches come with standard 15lbs rail brackets and hardware.

**Traction AC Controller Data Forms**

**Control Features**

EC Data Form.xls

Revised 11/25/11

Page 3 of 8

Job Name:

EC Job Number:

Machine room space limitations  H  W  D  
Explain: \_\_\_\_\_

Refer to page 6 of data forms, for applicable enclosure sizes (NEMA 1 only).

**Controller NEMA Rating Requirement:**

1 (standard)  12  4  4X  
 Air conditioned enclosure  
(recommended for all except NEMA 1)

**Type of Operation:**

Simplex:  
 Selective Collective  
 SAPB Single Automatic Pushbutton  
 Single Button Collective  
 Down Collective  
 Duplex Selective Collective  
 Group Number of Cars: \_\_\_\_\_  
Length of duplexing or grouping cable(s) required: \_\_\_\_\_ ft.  
Allow for an additional 5 feet at each end to permit hookup inside controller enclosure. (Interconnects between controllers and/or group)  
Number of hall call risers: \_\_\_\_\_

Swing Car Operation: Car(s): \_\_\_\_\_  
 Key switch in car  Key switch in hall  
 Cross Cancellation Panel  Cross Reg. Panel

**Fire Service Operation:**

Fire Service Phase I:  
 3 position keyswitch  2 position keyswitch  
 Fire Service Phase II (3 position keyswitch)  
Main Recall Landing #: \_\_\_\_\_ Floor Label: \_\_\_\_\_  
Doors will open at:  Front  Rear  
Alt. Recall Landing #: \_\_\_\_\_ Floor Label: \_\_\_\_\_  
Doors will open at:  Front  Rear  
 Additional Fire Recall Switch:  
Location Landing #: \_\_\_\_\_ Floor Label: \_\_\_\_\_

**Inspection Operation:**

Hoistway Access Operation:  
 Top access switch (top landing):  
Location:  Front  Rear  
 Bottom access switch (bottom landing):  
Location:  Front  Rear  
Top & bottom access switches are required to be 2 pole.  
 In-Car Inspection Operation:  
Requires a switch in the C.O.P. to enable In-Car Insp. and separate up & down buttons for car movement.

**HW Access & In-Car Inspection Sw. Type (COP):**

Hoistway access switch (2 position - 1 pole)  
 In-Car inspection switch (2 position - 1 pole)  
 Combo. HW access & In-Car insp. (3 position - 2 pole)

Absolute Floor Encoding (AFE) (A17.1-07 & CA required)  
 Attendant Operation:  Annunciator panel in car  
 Car to Lobby Switch:  Car  Hall  Other \_\_\_\_\_  
Park with doors:  Open  Closed  
Return Landing #: \_\_\_\_\_ Floor Label: \_\_\_\_\_

Earthquake Operation:  
 Seismic switch  Counterweight derailment device  
 Car adjacent to counterweight switch  
 Car operates on fire or hospital service (reduced speed)

Emergency Power Generator  
 E.P. contact during normal op.  Open  Closed  
 Power pre-transfer contact  
 Sequential lowering (standard)  
 If not, number of cars to run simultaneously: \_\_\_\_\_  
 Manual select switch: # of Pos: \_\_\_\_\_ Labels: \_\_\_\_\_  
A17.1-2000 requires indicator(s), if the switch is not in view of the elevator entrance(s).

Emergency Medical Technician Service (EMT):  
Return Landing #: \_\_\_\_\_ Floor Label: \_\_\_\_\_  
 Fan & Light Timer Operation  
 Hospital Service (Code Blue): (indicate landings served on page 2)  
# of cars allowed to run on hospital service: \_\_\_\_\_

Hospital Service Phase 2 Operation:  
 Hospital phase 2 switch  Independent service switch  
 Other (explain): \_\_\_\_\_

Independent Service Switch:  Car (std.)  Hall  
 Load Weighing:  By EC  Others: \_\_\_\_\_  
 K-Tech strain gauge: Model: \_\_\_\_\_  
 Discrete load weigher signals (dry contacts):  
 Hall call bypass  Anti-nuisance  Overload

Pit Flood Operation Recall Landing #: \_\_\_\_\_ Floor Label: \_\_\_\_\_

Sabbath Operation

Security (check applicable requirements below)  
 EC standard security (utilizing COP car call combinations)  
 Call lockout: (indicate landings served on page 2)

Car:  Card Reader  Key  Other: \_\_\_\_\_  
 Hall:  Card Reader  Key  Other: \_\_\_\_\_  
 Call lockout override switch:  Car  Hall

Bypass Security: (bypass on fire service is standard)  
 Independent Service  Attendant Service  
 Other: \_\_\_\_\_

Anti-Terrorism Control  
 Baby Abduction  Interact Security Control

Special Security: \_\_\_\_\_  
 Shutdown Switch:  Car  Hall

Additional features required: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_



**Traction AC Controller Data Forms**

**Door Information**

New door operator:  
Supplier: \_\_\_\_\_  
Contact: \_\_\_\_\_  
P.O.#: \_\_\_\_\_ Phone: \_\_\_\_\_  
 Existing door operator

**Car Gate and Hoistway Doors:**

Automatic car gate  
 Manual car gate  
 Gate release solenoid: Voltage: \_\_\_\_\_ V Ph. \_\_\_\_\_  
Current: \_\_\_\_\_ A Description: \_\_\_\_\_

**Automatic Passenger Door Operators:**

Place an "X" in the appropriate box to indicate

F	R	door operator. (F = Front and R = Rear)
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOVFR: <input type="checkbox"/> 230V <input type="checkbox"/> 115V
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOD (shunt wound): <input type="checkbox"/> 230V <input type="checkbox"/> 115V
<input type="checkbox"/>	<input type="checkbox"/>	GAL MODPM: <input type="checkbox"/> 230V <input type="checkbox"/> 115V
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOM/MOH
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOCT/MOCTA: <input type="checkbox"/> 230V <input type="checkbox"/> 115V
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOSVCL/MOMSVL/MOHSVL
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOA
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOMCT/MOHCT: <input type="checkbox"/> 230V <input type="checkbox"/> 115V
<input type="checkbox"/>	<input type="checkbox"/>	GAL MODCT/MOCT: <input type="checkbox"/> 240V <input type="checkbox"/> 120V
<input type="checkbox"/>	<input type="checkbox"/>	MAC PM-SSC
<input type="checkbox"/>	<input type="checkbox"/>	MAC Old Style
<input type="checkbox"/>	<input type="checkbox"/>	ECI: <input type="checkbox"/> 895 <input type="checkbox"/> 1000 <input type="checkbox"/> 2000 <input type="checkbox"/> VFE2500
<input type="checkbox"/>	<input type="checkbox"/>	Schindler QKS: <input type="checkbox"/> 14 <input type="checkbox"/> 15
<input type="checkbox"/>	<input type="checkbox"/>	Dover Type D
<input type="checkbox"/>	<input type="checkbox"/>	Dover: <input type="checkbox"/> DC62 <input type="checkbox"/> DC68
<input type="checkbox"/>	<input type="checkbox"/>	Dover: <input type="checkbox"/> HD70 <input type="checkbox"/> HD73 <input type="checkbox"/> HD91 <input type="checkbox"/> HDLM
<input type="checkbox"/>	<input type="checkbox"/>	Otis Type "F"
<input type="checkbox"/>	<input type="checkbox"/>	Otis: <input type="checkbox"/> 20S <input type="checkbox"/> 30S
<input type="checkbox"/>	<input type="checkbox"/>	Otis 6970A: <input type="checkbox"/> Reactance <input type="checkbox"/> Resistance
<input type="checkbox"/>	<input type="checkbox"/>	Otis 7300 (220VAC, 3PH)
<input type="checkbox"/>	<input type="checkbox"/>	Otis A7770A
<input type="checkbox"/>	<input type="checkbox"/>	Otis AT400
<input type="checkbox"/>	<input type="checkbox"/>	Otis 7782AA
<input type="checkbox"/>	<input type="checkbox"/>	Westinghouse Type B w/ retiring cam
<input type="checkbox"/>	<input type="checkbox"/>	Westinghouse Type E (120VDC)
<input type="checkbox"/>	<input type="checkbox"/>	Atlantic Tech <input type="checkbox"/> 9001 <input type="checkbox"/> 9003
<input type="checkbox"/>	<input type="checkbox"/>	IPC Encore (closed loop)
<input type="checkbox"/>	<input type="checkbox"/>	Fermator
<input type="checkbox"/>	<input type="checkbox"/>	Haughton: Model: _____
<input type="checkbox"/>	<input type="checkbox"/>	R & R
<input type="checkbox"/>	<input type="checkbox"/>	MCE Smartraq
<input type="checkbox"/>	<input type="checkbox"/>	Other:* _____

\*Please send/provide door operator wiring diagrams.

**Door Features:**

Infrared detector/dual-beam photo eye unit:  
 By EC (Weco-917P)  Customer Provided  
 Cut-out switch located in COP  
 Anti- nuisance  
 Mechanical safety edge  
 Heavy doors at landings: \_\_\_\_\_  
 Door hold:  Switch  Button: (time) \_\_\_\_\_ sec.  
 Nudging:  Reduced torque with buzzer  
 Buzzer only

**Hoistway Door Type:**

Automatic passenger (horizontal sliding)  
 Automatic freight (vertical sliding)  
 Swing\*  
 Manual\*  
\*Interlocks:  
 Door closed contacts (separate from locked contacts)  
 Door locked contacts  
Brand: \_\_\_\_\_ Model: \_\_\_\_\_  
Door locking cam:  
 Fixed  
 Mechanical (driven by automatic car gate)  
 Retiring: Voltage: \_\_\_\_\_  AC  DC Ph. \_\_\_\_\_  
Current: \_\_\_\_\_ A Notes: \_\_\_\_\_

**Power Freight Doors:** non-standard & freight doors prints are required

Door operator wiring diagrams have been sent to ECC\*  
Courion:  New  Existing\* Model: \_\_\_\_\_  
EMS:  New  Existing\* Model: \_\_\_\_\_  
Peele:  New  Existing\* Model: \_\_\_\_\_  
Other:  New  Existing\* Model: \_\_\_\_\_

**Freight Door Operation:**

Door Opening:  Automatic  Momentary pressure  
 Constant pressure  
Door Closing:  Automatic  Momentary pressure  
 Constant pressure  
Fire Ph. 1 Closing:  Automatic  Momentary pressure  
 Constant pressure

Notes: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**Traction AC Controller Data Forms**

**Machine Room Data - Traction AC**

EC Data Form.xls

Revised 11/25/11

Page 6 of 8

Job Name:

EC Job Number:

**Controller Type:**  V900  V800  
 VF-CL PVF (closed loop vector + position velocity feedback)  
 VF-CL (closed loop flux vector)  
 VF-OL (open loop vector) 150fpm or less only

**Line Voltage:** \_\_\_\_\_ (measured)  
 AC 3 phase (symmetrical with respect to ground)  
 AC single phase  
 60 Hz  50 Hz

**Machine:**  Existing  New  New from EC  
 Brand: \_\_\_\_\_  
 Location:  Overhead  Basement  MRL  
 Type:  Geared: \_\_\_\_\_  
 Gearless:  PM (permanent magnet)  Induction  
 Roped:  1:1  2:1

**Main Brake:**  
 DC  AC single phase  AC 3-phase  
 Number of brake coils:  1  2  Other: \_\_\_\_\_  
 Per coil voltage and resistance measurements:  
 Voltage Picking: \_\_\_\_\_ Voltage Holding: \_\_\_\_\_  
 Resistance: \_\_\_\_\_ ohms  Measured  Data sheet  
 If measured:  Hot  Cold  
 Contact on Brake:  N/O (closes when brake is picked)  
 N/C (opens when brake is picked)

**Emergency Brake:** (required on ASME A17.1-2000 and later)  
 Rope Brake:  Hollister Whitney  
 Other Brand: \_\_\_\_\_ Model: \_\_\_\_\_  
 Independent brake on machine: # of coils: \_\_\_\_\_  
 Other (explain): \_\_\_\_\_

**Additional Requirements:**  
 Isolation transformer required:  By EC  Others  
 Line reactor required  
 Motor choke or output filter required  
 AC Regenerative drive required  
 Machine blower: FLA: \_\_\_\_\_  
 Voltage: \_\_\_\_\_  AC  DC Phase: \_\_\_\_\_  
 Governor with remote set & reset solenoids:  
 Voltage: \_\_\_\_\_  AC  DC FLA: \_\_\_\_\_  
 Jawless governor (rope slack switch)  
 Reduced stroke buffers: Buffer rating: \_\_\_\_\_ fpm  
 Counterweight safety  
 Battery Emergency Power Supply (R & R Powervator)  
 By EC  Others  
 MRL Test/Rescue System with Video

**Hoist Motor:**  Existing  New  New from EC

Motor brand:  Reuland  Magil (Reliance)  
 Imperial  TorinDrive  
 Other: \_\_\_\_\_

**Induction Motor Data -**

HP: \_\_\_\_\_ Voltage: \_\_\_\_\_  
 Frequency: \_\_\_\_\_ Hz. FLA: \_\_\_\_\_ NLA: \_\_\_\_\_  
 Full Load RPM: \_\_\_\_\_ Synchronous RPM: \_\_\_\_\_  
 Number of poles: \_\_\_\_\_ Model #: \_\_\_\_\_

Motor mounting:  Foot  Flange  
 Shaft style:  Straight  Tapered

**PM Motor Data -**

HP: \_\_\_\_\_ Rated Frequency: \_\_\_\_\_ Hz.  
 Rated Voltage: \_\_\_\_\_ Rated Amps: \_\_\_\_\_  
 Peak Voltage: \_\_\_\_\_ Peak Amps: \_\_\_\_\_  
 Number of poles: \_\_\_\_\_ RPM: \_\_\_\_\_  
 Model #: \_\_\_\_\_

**Velocity Encoder:**

Existing  New  New by EC  
 Brand: \_\_\_\_\_ Model: \_\_\_\_\_  
 Encoder Cable:  Customer provided  EC Provided  
 Length Required: \_\_\_\_\_ ft.


**Enclosure Sizes (Nema 1) includes resistor box:**

- 47"H x 22"W x 16"D (Prodigy, 25HP drive max.)
- 63"H x 36"W x 14"D
- 77"H x 36"W x 13"D (standard)
- 77"H x 36"W x 17"D
- 77"H x 47"W x 17"D

Additional Information: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Using the grid layout below, identify each elevator by a number/name as appropriate for the building configuration. Place a 'X' through unused hoistways. Indicate location of the hall call pushbuttons, door openings and walls, as shown in the example below.

Example drawing of a 3 car group.

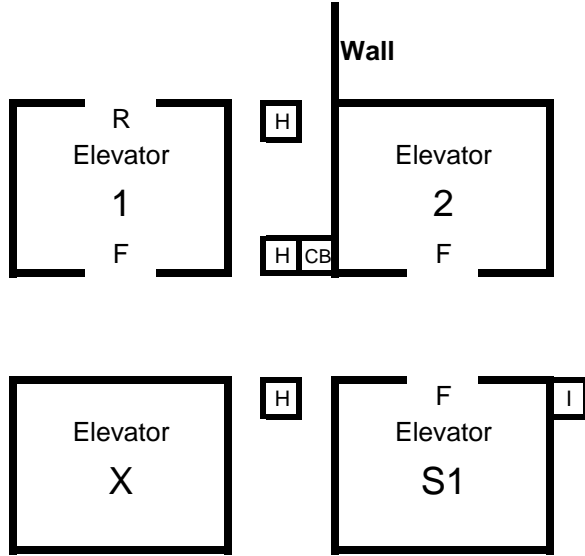


Door openings:  
F = Front opening  
R = Rear opening

Notes: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Hall Call Risers:

- H Hall call riser (group)
- I Inconspicuous riser (swing car riser)
- CB Code Blue (hospital service) riser

Notes: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

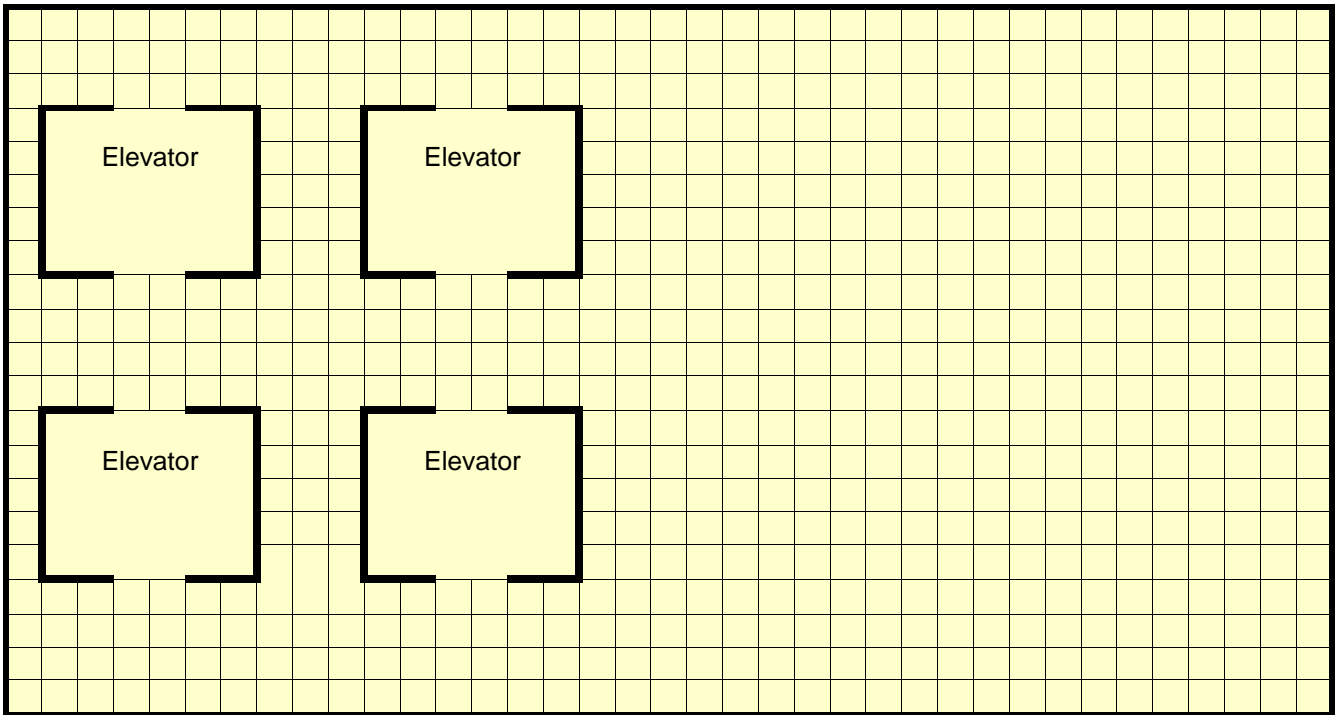

Special instructions: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Machine Room Monitor 19"LCD flat screen  
 Other: \_\_\_\_\_

Special Instructions: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Remote Monitoring Station:  
 Interact       Liftnet (IDS)       Kings III  
 Single Group       Multi-group  
 Desktop PC      Quantity: \_\_\_\_\_  
 Laptop PC      Quantity: \_\_\_\_\_  
 Monitor Type:  
 19" LCD flat screen (standard)  
 Other: \_\_\_\_\_

Distance from controller to remote PC\*: \_\_\_\_\_ ft.  
\*If distance is longer than 400ft. repeaters are required.

Location:  
 Lobby       Security room  
 Fire control room       Concierge desk  
 Other: \_\_\_\_\_

Communication media:  
 Ethernet  
 Line driver:  By ECC       Others  
 Modem:  By ECC       Others

Printer required

Using the grid layout below to sketch the remote monitoring system required.

