



A VANTAGE Company

Phone: (916) 428-1708, Fax: (916) 428-1728
Email: sales@elevatorcontrols.com



Controller Data Forms

Project Data

Pixel Master Data Forms.xls	Revised 06/09/2021	Page 1 of 8
Job Name:	EC Job Number:	

Date Received: _____

Instructions:

1. Please fill out these data forms as completely as possible. Incomplete data may delay delivery.
2. A blank or no selection will be considered as item not applicable to this project.
3. All applicable data should be measured on the existing equipment, when it is to be retained.
4. The bottom landing shall be referred to as landing 1, and shall be the reference landing without regard to the building floor labels.
5. Contact Elevator Controls Corporation engineering department at 916-428-1708, if any questions arise regarding the required data.

NOTE: Your controller will be built according to the data furnished herein.

EC Quote #: _____ P.O. #: _____ Customer #: _____

Job Name: _____

Job Location: _____
Job Address: _____
Job City: _____
Job State: _____ **Zip Code:** _____

Yes No Job Specifications
 Yes No Specifications have been sent to EC
Consultant: _____
Contact: _____
Phone: _____ **Fax:** _____
Email: _____

Contractor Information:

Company: _____
Contact Name: _____
Address: _____
City: _____
State: _____ **Zip Code:** _____
Phone: _____ **Fax:** _____
Email: _____

Installation Type: New Construction
 Modernization
Duty Type: Passenger Service Freight
Building Classification:
 Office Hotel, Apartment, Condo
 Government Hospital/Medical Facility
 School or University Prison/Jail
 Other: _____

Shipping Information:

Company: _____
Contact Name: _____
Shipping Address: _____
City: _____ **State:** _____ **Zip Code:** _____
Phone: _____ **Fax:** _____
Email: _____

Code Compliance United States:
 A17.1-20xx -16 -13 -10 -07 -04
 Other (specify) - _____

Code Compliance International:
 Canada B44- -16 -13 -10 -07 -04
 Other (specify) - _____

Notice Required:
 24 Hours 48 Hours Other: _____
Shipping Method: Ground Air
 Lift gate truck required

Additional state or local code compliance:
 Chicago Nebraska
 GSA/Federal New York City
 Michigan Washington (Seattle)
 Other: _____

Motor(s) ship to address (if supplied by EC):

Motor Reference #: _____
 Same as above shipping information
Contact Name: _____
Shipping Address: _____
City: _____ **State:** _____ **Zip Code:** _____
Phone: _____ **Fax:** _____
Email: _____

Additional Compliance Requirements? Explain

Delivery Schedule	
Controller	Delivery Date (on site)
Car	
Car	
Car	
Car	
Group	
Cross Registration Panel	

Data Forms Completed By:
Name/Title: _____
Phone: _____ **Fax:** _____
Mobile: _____
Email: _____
Company: _____
Signature: _____



A VANTAGE Company

Phone: (916) 428-1708, Fax: (916) 428-1728
Email: sales@elevatorcontrols.com



Controller Data Forms

Hoistway Data

Pixel Master Data Forms.xls	Revised 06/09/2021	Page 2 of 8
Job Name:	EC Job Number:	

Instructions:

1. Place an "X" in the appropriate box to indicate a floor opening. (F=Front & R=Rear)
2. To ensure the proper Landa stainless steel coded tape length, indicate all floor heights (including overhead and pit).
3. Provide an additional hoistway data page for each elevator that has different floor heights or openings.

EC Elevator ID:			Car A		Car B		Car C		Car D		Car E		Car F		Car C.L.		Hall C.L.		CODE BLUE		I.R.					
Building Elevator ID:																										
LDG #	Floor Label	Floor Height	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R
	Overhead																									
32																										
31																										
30																										
29																										
28																										
27																										
26																										
25																										
24																										
23																										
22																										
21																										
20																										
19																										
18																										
17																										
16																										
15																										
14																										
13																										
12																										
11																										
10																										
9																										
8																										
7																										
6																										
5																										
4																										
3																										
2																										
1																										
	Pit																									
Capacity: <input type="checkbox"/> lbs <input type="checkbox"/> kg															Lobby landing #: <input type="text"/>		Floor Label: <input type="text"/>									
Speed: <input type="checkbox"/> fpm <input type="checkbox"/> m/s															Car C.L. = Car Call Lockout Floor Hall C.L. = Hall Call Lockout Floor I.R. = Inconspicuous Riser (Swing Op.)											
Total Travel <input type="checkbox"/> ft <input type="checkbox"/> m																										
Traveler* <input type="checkbox"/> ft <input type="checkbox"/> m															<input type="checkbox"/> Kellems Grips (total qty): <input type="text"/>											

Number of Hoistways: 1 2 _____ Standard hoistway equipment is NEMA 1 Other:

Final limit switches by EC (needed for traction elevators only, 2 total, cam by others)**

Each Pixel control system includes Landa, a non-contact encoded car positioning system that features an encoded stainless steel tape and requires no magnets or terminal slow down switches to be installed.

*Specify travel cable length if ordering **Pixel custom travel cable (optional)**. Specify length needed per car.

**Mechanical (LS1) final limit switches come with standard 15lbs rail brackets and hardware.

Control Features

Job Name:	EC Job Number:
-----------	----------------

Machine room space limitations H W D
 Explain: _____

Refer to page 6 of data forms for NEMA 1 enclosure sizes

Controller NEMA Rating Requirement:

1 (standard) 12 4 4X
 Air conditioned enclosure
 Forced air ventilation
 Enclosure interior lighting

Type of Operation:

Simplex:
 Selective Collective Single Auto Push Button
 Down Collective Single Button Collective
 Group Number of Cars: _____

Central connection point for communication is usually in the controller for Car #1. Specify lengths for communication cables (Car 1 to Car 2, Car 1 to Car 3, etc.). Allow for an additional 5 feet at each end to permit hookup inside the controller enclosure. _____

Number of hall call risers: _____

Cross Registration Panel

Swing Car Operation: Car(s): _____
 Key switch in car Key switch in hall
 Automatically switch when IR call is registered
 Dedicated riser for swing hall calls

Fire Service Operation:

Fire Service Phase I:
 3 position keyswitch 2 position keyswitch
 Fire Service Phase II (3 position keyswitch)
 Main Recall Landing #: _____ Floor Label: _____
 Doors will open at: Front Rear
 Alt. Recall Landing #: _____ Floor Label: _____
 Doors will open at: Front Rear

Additional Fire Recall Switch:
 Location Landing #: _____ Floor Label: _____

Inspection/Hoistway Access Operations:

In-Car Inspection Operation
 Hoistway Access Operation
 Top access switch (top landing):
 Location: Front Rear
 Bottom access switch (bottom landing):
 Location: Front Rear

In-Car Switch Type(s):

2-position Access Enable Switch
 2-position In-Car Inspection Switch
 3-position Inspection and HW Access switch

Operation on In-Car Inspection requires an Enable button and separate Up & Down buttons inside elevator cab.

Attendant Operation Annunciator panel in car
 Car to Lobby Switch: Car Hall Other _____

Cancel car calls immediately Answer new car calls
 Park with doors: Open Closed
 Return Landing #: _____ Floor Label: _____

Earthquake Operation:
 A17.1-16 compliance (HW scan switch, indicators, etc.)
 Seismic switch Counterweight derailment device
 Car operates on fire or hosp. service (reduced speed)

Emergency Power Generator
 E.P. contact during normal op. Open Closed
 Power pre-transfer contact
 Sequential lowering (standard)
 If not, number of cars to run simultaneously: _____
 Manual select switch: # of Pos: _____ Labels: _____

A17.1-2000+ requires indicator(s) if the elevators cannot be seen from the selection switch location.

Emergency Medical Technician Service (EMT):
 Return Landing #: _____ Floor Label: _____

Fan & Light Timer Operation (Elevator Cab)

Hospital Service (Code Blue): (indicate landings served on page 2)
 # of cars allowed to run on hospital service: _____
 Hospital Service Phase 2 Operation initiated by:
 Hospital phase 2 switch Independent service switch
 Other (explain): _____

Independent Service Switch: Car (std.) Hall

Load Weighing: By EC Mfg: _____

Rope Tension X-head Deflect Isolated platform
 Dry contact load weigher signals (not for pre-torque):
 Hall call bypass Anti-nuisance Overload

Pit Flood Operation Return landing: _____

Sabbath Operation

Security (check applicable requirements below)
 Call lockout: (indicate landings served on page 2)
 Car: Card Reader Key Other: _____
 Hall Card Reader Key Other: _____

Call lockout override switch: Car Hall
 Car call security (enter code using car call buttons)
 Bypass Security: (bypass on fire service is standard)
 Independent Service Attendant Service
 Other: _____

Additional features required: _____



A VANTAGE Company

Phone: (916) 428-1708, Fax: (916) 428-1728
Email: sales@elevatorcontrols.com



Controller Data Forms

Indicators

Pixel Master Data Forms.xls	Revised 06/09/2021	Page 4 of 8
Job Name:	EC Job Number:	

The Pixel control system requires all fixtures to be 24VDC, 3-6 watts maximum.

Car Call Registration Indicators:

Pixel Standard - CAN communication to COP

Auxiliary COP(s)

of car stations per car: _____

Hall Call Registration Indicators:

Pixel Standard - CAN communication to HALL

Hall Calls through CAN Communication

Hall Calls through discrete I/O

Number of hall call risers: _____

If more than 2 hall call risers, please explain on page 7 (Hoistway Layout).

Passing Floor Chime:

EC 3-wire C.E. Micro Comm

EC 3-wire E-Motive

Pixel COP (24VDC, 6W max.)

Passing floor enable button ("S" button)

Position Indicators:

EC 3-wire C.E. Micro Comm

EC 3-wire E-Motive

EC DL-20 E.C.C.

PI CAN network interface

MAD

VEGA

E-Motive

HM

ELEVAKE

Other: _____

Car position indicator

Hall position indicator

Location(s): Main Fire All Floors

Other: _____

Voice annunciation device

CE Micro Comm, Emotive 3-wire or CAN driven only

Lanterns:

Car lanterns:

Chime

Gong

EC 3-wire C.E. Micro Comm

EC 3-wire Emotive

Pixel COP (24VDC, 6W max.)

Hall lanterns:

Chime

Gong

EC 3-wire C.E. Micro Comm

EC 3-wire Emotive

Pixel Hall System (24VDC, 6W max.)

CAN Communication via P-HALL boards (1 per floor)

Location(s): All Floors Lobby Only

Other: _____

Delivery of Fixture Node Boards (Pre-wiring)

Ship Fixture Node Boards with Controller

Ship Fixture Node Boards in advance to:

Company: _____

Contact Name: _____

Phone #: _____ Ref #: _____

Email: _____

Address: _____

City: _____ State: _____ Zip: _____

Miscellaneous Fixtures (24VDC, 3W max.):

Indicator description:	
<input type="checkbox"/> Emergency power light (Hall)	
<input type="checkbox"/> Emergency power panel lights	
<input type="checkbox"/> Fire service light (COP & Hall)	
<input type="checkbox"/> Fire control panel (provide fixture prints/details)	
<input type="checkbox"/> Heavy load light (Hall)	
<input type="checkbox"/> Hospital service light (COP)	
<input type="checkbox"/> Hospital service buzzer (COP)	
<input type="checkbox"/> In-use Lights	
<input type="checkbox"/> Lobby control panel (provide fixture prints/details)	
<input type="checkbox"/> Overload light / buzzer (COP)	

CAN Serial Hall Call/Lantern RJ45 Connection Options

NOTE: The standard cable package will be provided if no alternate selection is made.

Standard Cable Package

- Controller-to-first node: Length: 25 ft
- Floor-to-floor: One per floor, Length 14 ft, or
- Floor-to-floor: Two per floor, Length 7 ft (if hall lanterns)
- Splitter-to-node: One per node, Length 5 ft
- Splitter-to-node (one per Access Switch): Length 7 ft
- Fire Switch Node to Hall Call Node (one): Length 6 inches
- Splitters (enough for standard node network)

Alternate lengths needed (indicate quantity and lengths)

Controller-to-first node: Length: _____

Floor-to-floor: Qty: _____ Lengths: _____

Splitter-to-hall node: Qty: _____ Lengths: _____

Splitter-to-access nodes: Qty: _____ Lengths: _____

Fire Switch Node to Hall Call Node: Length: _____

Additional Comments:



A VANTAGE Company

Phone: (916) 428-1708, Fax: (916) 428-1728
Email: sales@elevatorcontrols.com



Controller Data Forms

Door Information

Pixel Master Data Forms.xls	Revised 06/09/2021	Page 5 of 8
Job Name:		EC Job Number:

New door operator:
 Supplier: _____
 Contact: _____
 P.O.#: _____ Phone: _____

Existing door operator

Car Gate and Hoistway Doors:

Automatic car gate
 Manual car gate
 Gate release solenoid: Voltage: _____ V Phase _____
 Current: _____ A Description: _____

Automatic Passenger Door Operators:

Place an "X" in the appropriate box(es) to indicate door operator (F = Front and R = Rear). Operators shown in **italics** require interface module mounted on cartop.

F	R				
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOVFR:	<input type="checkbox"/> 230V	<input type="checkbox"/> 115V	
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOVFE:	<input type="checkbox"/> 230V	<input type="checkbox"/> 115V	
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOVFE CAN bus:	<input type="checkbox"/> 230V	<input type="checkbox"/> 115V	
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOD (shunt wound):	<input type="checkbox"/> 230V	<input type="checkbox"/> 115V	
<input type="checkbox"/>	<input type="checkbox"/>	GAL MODPM:	<input type="checkbox"/> 230V	<input type="checkbox"/> 115V	
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOM/MOH			
<input type="checkbox"/>	<input type="checkbox"/>	MAC PM-SSC			
<input type="checkbox"/>	<input type="checkbox"/>	ECI: <input type="checkbox"/> 895 <input type="checkbox"/> 1000 <input type="checkbox"/> 2000 <input type="checkbox"/> VFE2500			
<input type="checkbox"/>	<input type="checkbox"/>	Atlantic Tech	<input type="checkbox"/> 9001	<input type="checkbox"/> 9003	
<input type="checkbox"/>	<input type="checkbox"/>	Dover/TKE: <input type="checkbox"/> HD73 <input type="checkbox"/> HD85 <input type="checkbox"/> DC68			
<input type="checkbox"/>	<input type="checkbox"/>	Dover/TKE: <input type="checkbox"/> HDLM <input type="checkbox"/> PA LULA			
<input type="checkbox"/>	<input type="checkbox"/>	Fermator VVVF5			
<input type="checkbox"/>	<input type="checkbox"/>	IPC Encore (closed loop) <input type="checkbox"/> D2000 <input type="checkbox"/> D3000			
<input type="checkbox"/>	<input type="checkbox"/>	KONE AMD			
<input type="checkbox"/>	<input type="checkbox"/>	MCE Smartrak			
<input type="checkbox"/>	<input type="checkbox"/>	Nova BG101			
<input type="checkbox"/>	<input type="checkbox"/>	Otis AT400 <input type="checkbox"/> Customer-supplied Pwr Supply			
<input type="checkbox"/>	<input type="checkbox"/>	Otis 6970A (Reactance)			
<input type="checkbox"/>	<input type="checkbox"/>	R&R DC244			
<input type="checkbox"/>	<input type="checkbox"/>	Schindler QKS: <input type="checkbox"/> 14 <input type="checkbox"/> 15			
<input type="checkbox"/>	<input type="checkbox"/>	Other: _____			

*Please send/provide door operator wiring diagrams.

Door Features:

Infrared detector/dual-beam photo eye unit:
 By EC (Weco-917P-2D) Customer Provided
 With GAL door operator (MOVFR, MOVFE)
 Cut-out switch located in COP
 Anti- nuisance
 Mechanical safety edge
 Front heavy doors at landings: _____
 Rear heavy doors at landings: _____
 Door hold: Switch Button: (time) _____ sec.
 Nudging: Reduced torque with buzzer
 Buzzer only

Notes: _____

Electric Door Restrictor
 Brand: _____ Model: _____

Hoistway Door Type:

Automatic passenger (horizontal sliding)
 Automatic freight (vertical sliding)
 Swing*
 Manual*
 *Interlocks:
 Door closed contacts (separate from locked contacts)
 Door locked contacts
 Brand: _____ Model: _____

Door locking cam:
 Fixed
 Mechanical (driven by automatic car gate)
 Retiring: Voltage: _____ V DC AC
 Current: _____ A Phase: _____
 Notes: _____

Power Freight Doors:

Door operator wiring diagrams have been sent to EC*
 Courion: MP iLearn Other: _____
 EMS (provide prints) Model: _____
 Peelle: PLC Wireless Other: _____
 Other (provide prints): _____

Freight Door Operation:

Door Opening: Automatic Momentary pressure
 Constant pressure
 Door Closing: Automatic Momentary pressure
 Constant pressure
 Fire Ph. 1 Closing: Automatic Momentary pressure
 Constant pressure

Notes: _____

Machine Room Data - Hydraulic

Pixel Master Data Forms.xls	Revised 06/09/2021	Page 6 of 8
Job Name:		EC Job Number:

Line Voltage: _____ (measured)

- AC 3 phase (symmetrical with respect to ground)
- AC single phase
- 60 Hz 50 Hz

Hydraulic Pump Motor Data:

- Existing New New from EC
- Brand: _____ Model: _____
- HP: _____ FLA: _____
- Voltage: _____ VAC, 3 Phase, 60Hz
- Measured Data sheet
- Multiple pump motors:
 - Number of motors: 2 Other: _____
 - Number of disconnects: 1 2 Other: _____
 - Sequential Starting (standard)
 - Simultaneous Starting
- Note: Standard - no single motor operation.
- Number of starts/hour rating: 80 (standard) 120

Motor Starting:

- By EC
- Customer-supplied starter:
 - Brand: _____ Model: _____

*Due to electrical certification requirements, a motor starter that is not installed by the factory shall not be mounted inside the controller cabinet.

- Solid State Sprecher+Schuh (standard)
- Siemens (additional charges apply)
- 3/9 lead motor 6/12 lead motor
- WYE-Delta
- ATL (across the line)
- Other*: _____

*Wiring diagrams are required.

Valve Data:

- Brand: Maxton EECO Blain
- TKE/Dover Bucher GMV
- Other: _____

Model: _____

- Number of valves: 1 (standard) 2 3 4 _____
- Coils per valve: 1 2 3 4 (standard) _____
- Valve voltage: 120VAC (standard) Other: _____ AC

Note: If voltage is not specified, 120VAC will be provided:

Additional Requirements:

- Low oil switch
- Viscosity control
- Pressure switch
(required when top of cylinder is above top of storage tank)
- Roped hydraulic unit:
 - Make: _____ Describe: _____
 - Governor with remote set & reset solenoids:
 - Coil Voltage: _____ AC DC FLA: _____
 - Electrical schematic required for set reset solenoids
 - Synchronizing circuit for dual and telescopic pistons
 - Load Weighing Interface
 - Brand/model: _____

Battery powered lowering device:

- By EC Customer-supplied*
- *If customer-supplied, model: _____

- Passenger doors Power freight doors
- Mount inside controller at factory (standard)
- Remote-mounted

*Due to electrical certification requirements, a battery lowering unit that is not installed by the factory shall not be mounted inside the controller cabinet.

NEMA 1 Enclosure Sizes:

Select a Nema 1 enclosure if a specific size is preferred. EC Manufacturing will determine if the required components will fit within the enclosure selected, and will advise if not possible. If no selection is made, EC will select the smallest enclosure size available.

- 30"H x 36"W x 8"D (wall mount & lift off door)
- 38"H x 36"W x 12"D (wall mount & lift off door)
- 48"H x 36"W x 14"D (wall mount & lift off door)

- Hinged door option
- Legs for floor-mounting a wall-mount enclosure
 - 12" (single) 24" (double)

Additional Information: _____



A VANTAGE Company

Phone: (916) 428-1708, Fax: (916) 428-1728
Email: sales@elevatorcontrols.com



Controller Data Forms

Machine Room Data - Traction AC

Pixel Master Data Forms.xls	Revised 06/09/2021	Page 6 of 8
Job Name:	EC Job Number:	

Line Voltage: _____ (measured)
 AC 3 phase (symmetrical with respect to ground)
 AC single phase
 60 Hz 50 Hz

Machine: Existing New New from EC
 Brand: _____
 Location: Overhead Basement MRL
 Type: Geared: _____
 Gearless: PM (Perm. Magnet) Induction
 Roped: 1:1 2:1 Underslung
 Ropes are 8mm (0.315") diameter or smaller

Main Brake:
 DC AC single phase AC 3-phase
 Number of brake coils: 1 2 Other _____
 Per coil voltage and resistance measurements:
 Voltage Picking: _____ Voltage Holding: _____
 Resistance: _____ ohms Measured Data
 If measured: Hot Cold
 Contact on Brake: N/O (closed = brake is picked)
 N/C (open = brake is picked)

Emergency Brake (required on A17.1-2000 and later):
 Rope brake: Hollister Whitney Draka RB500
 Other Brand: _____ Model: _____
 Independent brake on machine # of coils: _____
 Voltage picking: _____ Voltage Holding: _____
 Resistance: _____ Ohms
 Other (explain): _____

Additional Requirements:
 Isolation Xfrmr By EC Nema rating: _____
 Opt. fuse kit (Iso Xfrmr secondary overcurrent protection)
 Line reactor
 Motor choke or output filter
 AC Regenerative Drive
 Machine blower: _____ FLA: _____
 Voltage: _____ AC DC Phase: _____
 Governor with remote set & reset solenoids:
 Voltage: _____ AC DC FLA: _____
 Jawless governor (rope slack switch)
 Reduced stroke buffers: Buffer rating: _____ fpm
 Counterweight safety
 Battery Power Rescue
 By EC Nema rating: _____
 MRL Test/Rescue System with Video

Hoist Motor: Existing New New from EC

Motor brand: Reuland Magil (Reliance)
 Imperial TorinDrive
 Other: _____

Induction Motor Data
 HP: _____ Voltage: _____
 Frequency: _____ Hz. FLA: _____ NLA: _____
 Full Load RPM: _____ Synchronous RPM: _____
 Number of poles: _____ Model #: _____
 Motor mounting: Foot Flange
 Shaft style: Straight Tapered

PM Motor Data
 HP: _____ Rated Frequency: _____ Hz.
 Rated Voltage: _____ Rated Amps: _____
 Peak Voltage: _____ Peak Amps: _____
 Number of poles: _____ RPM: _____
 Model #: _____

Velocity Encoder:
 Existing New New by EC
 (If New by EC) Live motor shaft diameter: _____
 Brand: _____ Model: _____
 Encoder Pulses: _____ PPR
 Encoder Cable provided by:
 Customer By EC Length: _____ ft.
 (if by EC)

NEMA 1 Enclosure Sizes (includes resistor box):
 Select a Nema 1 enclosure if a specific size is preferred.
 EC Manufacturing will determine if the required components will fit within the enclosure selected, and will advise if not possible. If no selection is made, EC will select the smallest enclosure size possible.
 53"H x 36"W x 12"D (wall mount & lift off door)
 63"H x 36"W x 14"D (wall mount & lift off door)
 77"H x 36"W x 13"D (floor mount & single door)
 77"H x 36"W x 17"D (floor mount & single door)
 77"H x 47"W x 17"D (floor mount & double door)
 Hinged door option
 Legs for floor-mounting a wall-mount enclosure
 12" (single) 24" (double)

Additional Information: _____



A VANTAGE Company

Phone: (916) 428-1708, Fax: (916) 428-1728
Email: sales@elevatorcontrols.com



Controller Data Forms

Machine Room Data - Traction DC

Pixel Master Data Forms.xls	Revised 06/09/2021	Page 6 of 8
Job Name:		EC Job Number:

Line Voltage: _____ (measured)

- AC 3 phase (symmetrical with respect to ground)
- AC single phase
- 60 Hz 50 Hz

Machine: Existing New

Brand: _____

Location: Overhead Basement MRL

Type: Geared: _____
 Gearless

Roping 1:1 2:1 Underslung

Ropes are 8mm (0.315") diameter or smaller

Brake:

DC AC single phase AC 3 phase

Number of brake coils: 1 2 Other _____

Per coil voltage and resistance measurements:

Voltage Picking: _____ Voltage Holding: _____

Resistance: _____ ohms Measured Data

If measured: Hot Cold

Contact on Brake: N/O (closed = brake is picked)

N/C (open = brake is picked)

Emergency Brake (required on A17.1-2000 and later):

Rope brake: Hollister Whitney Draka RB500

Other Brand: _____ Model: _____

Independent brake on machine # of coils: _____

 Voltage picking: _____ Voltage Holding: _____

 Resistance: _____ Ohms

Other (explain): _____

Additional Requirements:

Isolation Transfmr By EC Nema Rating: _____

Opt. fuse kit (Iso Xfmr secondary overcurrent protection)

DC Choke By EC Nema Rating: _____

Machine blower: FLA: _____

 Voltage: _____ AC DC Phase: _____

Governor with remote set & reset solenoids:

 Voltage: _____ AC DC FLA: _____

Jawless governor (rope slack switch)

Reduced stroke buffers: Buffer rating: _____ fpm

Counterweight safety

Additional Information: _____

Hoist Motor: Existing New

Brand: _____

HP: _____ Voltage: _____ FLA: _____

RPM: _____

Other name plate data: _____

Hoist Motor Shunt Field: _____

Shunt field voltages: _____

Forcing: _____ Running: _____ Standing: _____

Shunt field resistance: _____ ohms # of coils: _____

- Measured Data sheet
- Series Series/parallel
- Hot Cold

Loop Circuit Voltage: (measured at the motor brushes while running)

Up empty car: _____ VDC at speed: _____ fpm

Down empty car: _____ VDC at speed: _____ fpm

Loop Circuit Current: (measured while running)

Empty Car Up: _____ A at speed: _____ fpm

Empty Car Down: _____ A at speed: _____ fpm

Peak currents: Up: _____ A Down: _____ A

Velocity Encoder:

Existing New New by EC

(if New by EC) Live motor shaft diameter: _____

Brand: _____ Model: _____

Encoder Pulses: _____ PPR

Encoder Cable provided by:

Customer By EC Length: _____ ft.

(if by EC)

NEMA 1 Enclosure Sizes (includes resistor box):

Select a Nema 1 enclosure if a specific size is preferred.

EC Manufacturing will determine if the required components will fit within the enclosure selected, and will advise if not possible. If no selection is made, EC will select the smallest enclosure size possible.

63"H x 36"W x 14"D (wall mount & lift off door)

77"H x 36"W x 13"D (floor mount & single door)

77"H x 36"W x 17"D (floor mount & single door)

77"H x 47"W x 17"D (floor mount & double door)

Hinged door option

Legs for floor-mounting a wall-mount enclosure


12" (single) 24" (double)

Hoistway Layout

Pixel Master Data Forms.xls	Revised 06/09/2021	Page 7 of 8
Job Name:	EC Job Number:	

Using the grid layout below, identify each elevator by a number/name as appropriate for the building configuration. Place a 'X' through unused hoistways. Indicate location of the hall call pushbuttons, door openings and walls, as shown in the example below.

Example drawing of a 3 car group.

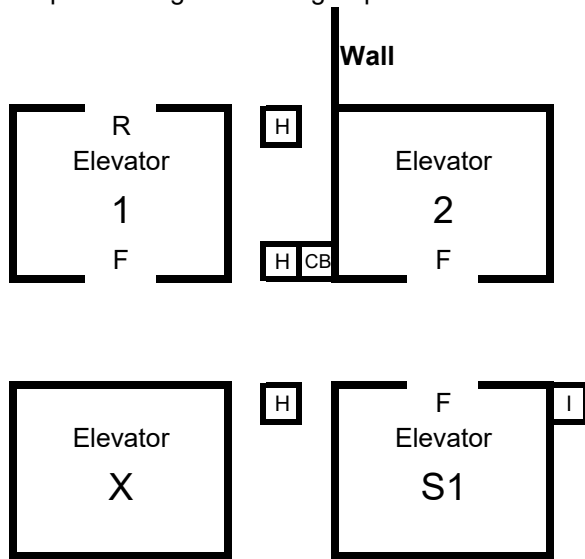


Door openings:
 F = Front opening
 R = Rear opening

Notes: _____

Hall Call Risers:

- H Hall call riser (group)
- I Inconspicuous riser (swing car riser)
- CB Code Blue (hospital service) riser

Notes: _____

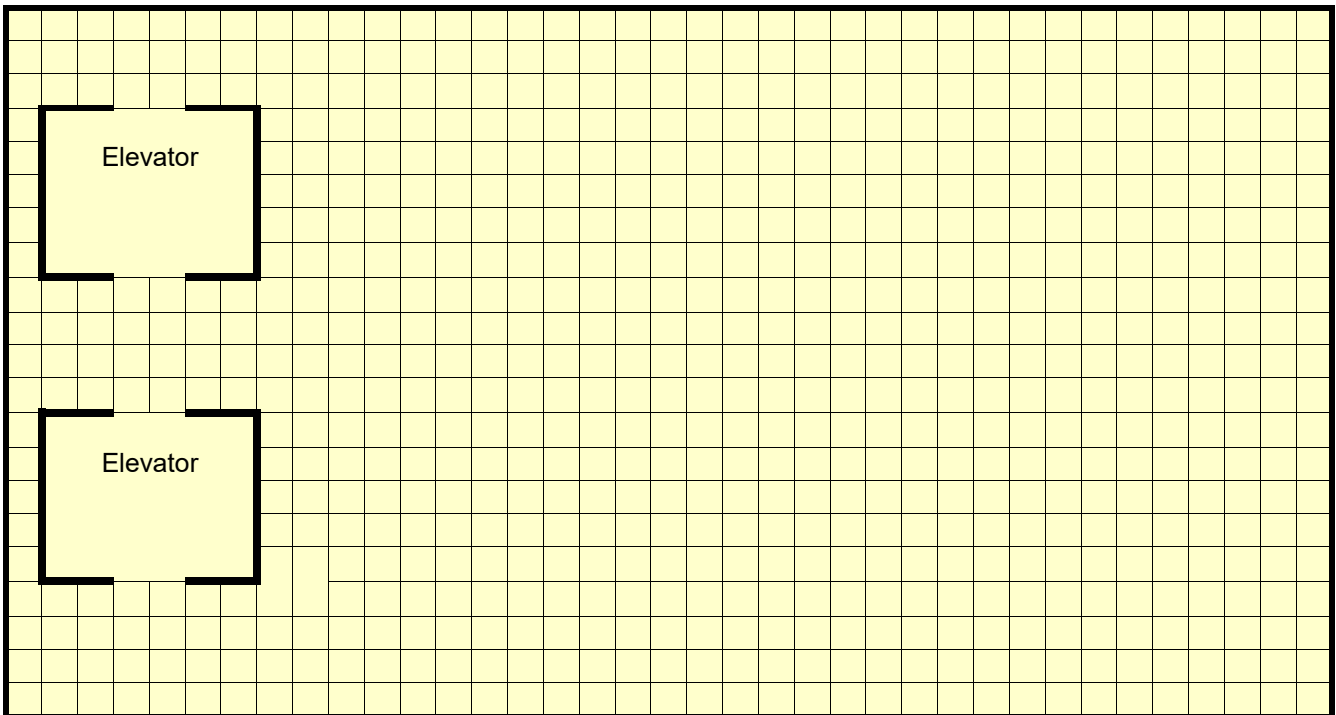

Special instructions: _____



A VANTAGE Company

Phone: (916) 428-1708, Fax: (916) 428-1728
Email: sales@elevatorcontrols.com



Controller Data Forms

Monitoring Data

Pixel Master Data Forms.xls	Revised 06/09/2021	Page 8 of 8
Job Name:	EC Job Number:	

Machine Room Monitor (20" LCD is standard)
 Other: _____

The central connection point for the Machine Room PC is located at the PC. Specify lengths for communication cables (Car 1 to PC, Car 2 to PC, Car 3 to PC, etc.). Allow for an additional 5 feet to permit hookup inside the controller enclosure. _____

Special Instructions: _____

Remote Monitoring Station(s):

Interact Liftnet (IDS)
 Single Group Multi-group

Desktop PC Quantity: _____
 Laptop PC Quantity: _____

Monitor Type:
 LCD flat screen (standard)
 Other: _____

Distance from controller to remote PC*: _____ ft.
 *If distance is longer than 400ft. repeaters are required.

Remote workstation location(s):

Lobby Security room
 Fire control room Concierge desk
 Other: _____

Interfaces to 3rd Party Monitoring Systems

Kings III
 Schindler Lobby Vision (dry contact interface)
 Mitsubishi MeEye (dry contact interface)
 Other (describe): _____

Communication media:
 Ethernet
 Line driver: By EC Others

Printer(s) required Quantity: _____

Using the grid layout below to sketch the remote monitoring system required.

